


NOVI IZGLED
NOVE MOGUĆNOSTI

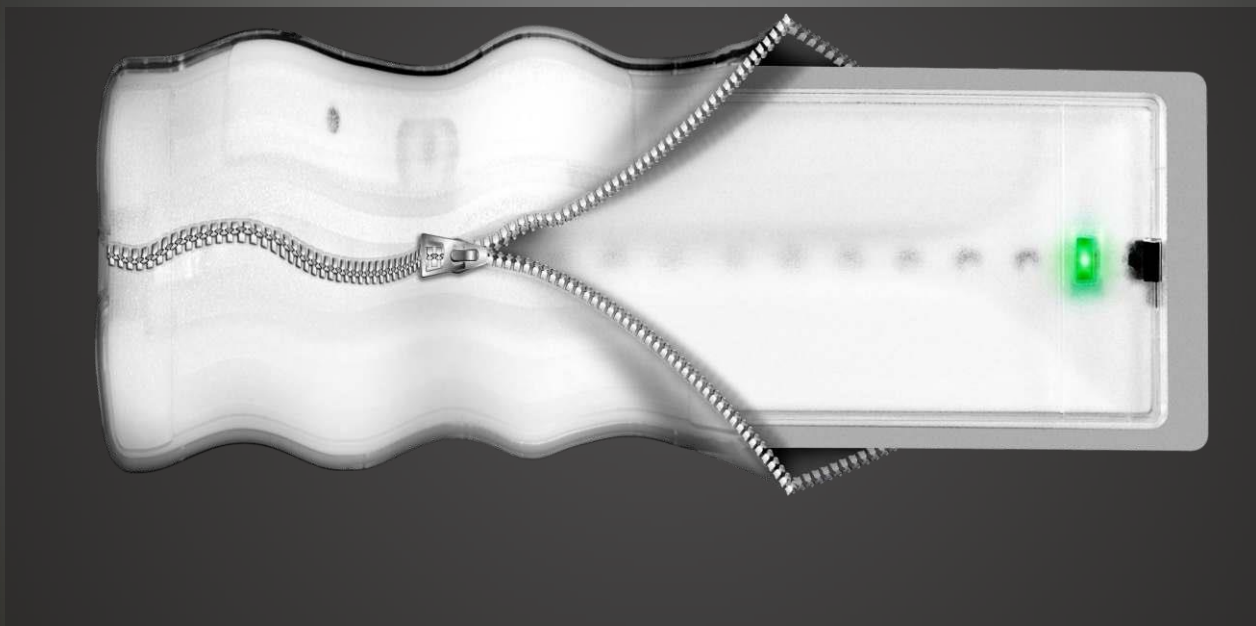

PANIK SVJETILJKA

ML-8/leds

ML-9/leds




- Visoka LED tehnologija
- Niski profil
- Lijep izgled i dizajn
- 3 sata rada bez napajanja
- Brza instalacija i montaža
- Uvijek aktivna



ML-8/led ML-9/led

TEHNIČKE SPECIFIKACIJE

	ML-8/LEDS	ML-9/LEDS
NAPON	220-240V AC/50-60Hz	
MAX POTROŠNJA ENERGIJE	2,7W / 3VA	3W / 3,5VA
BATERIJE (Ni-Cd)	3,6V/0,6Ah	3,6V/1Ah
INDIKATORI - KONTROLE	Bateriju pune indikatori LEDs, TEST button	
VRIJEME PUNJENJA	24 sata	
MINIMALNO SAMOSTALNO TRAJANJE	1,5 sat	3 sata
IZVOR OSVJETLJENJA	12 white LED's	
OSVJETLJENJE (230V AC / emergency)	35lm / 85lm	32lm / 85lm
STEPEN ZAŠTITE POKRIVA	IP 20	
PROIZVEDENO U SKLADU SA:	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3	
PODRUČJE RADNE TEMPERATURE	5 do 40 °C	
RELATIVNA VLAŽNOST	do 95%	
GRADEVINSKI MATERIJAL	Bayblend Fr3010, prozirni polikarbonat	
VANJSKE DIMENZIJE	240 x 90 x 44 mm	
TEŽINA	345gr.	350gr.
GARANCIJA	3 godine (1 godina za bateriju)	

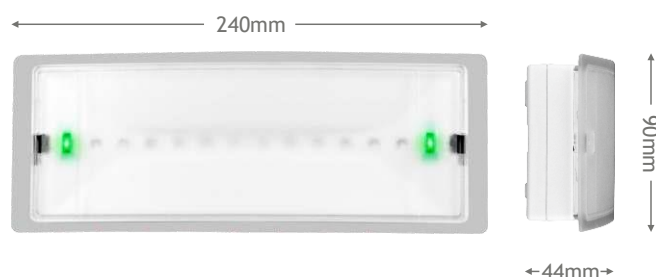

Distributer



MOD-LIGHT Group d.o.o.
e-mail: mlgroupdoo@gmail.com

