


NEW LOOKS  
NEW CAPABILITIES

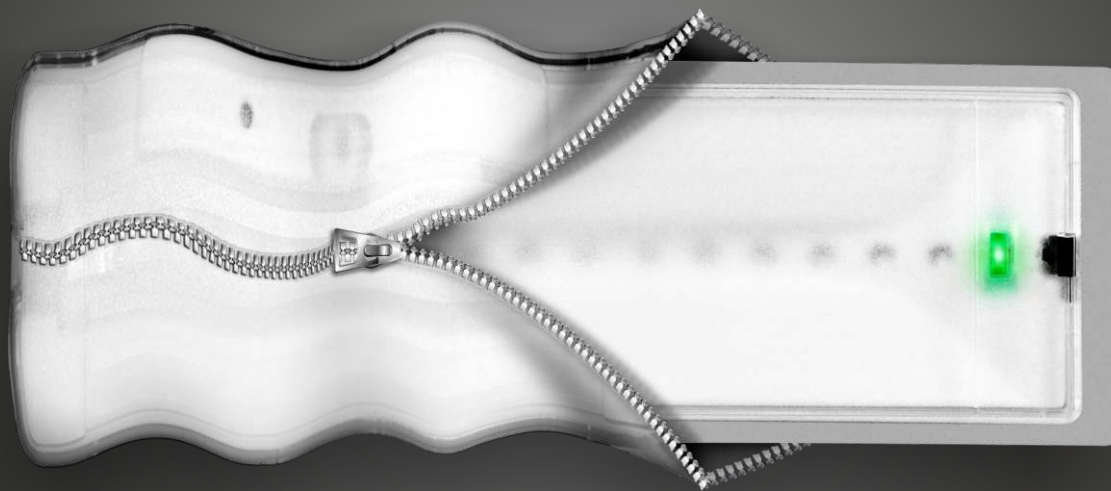

Emergency luminaire

## Slim Light

ML-8/LEDS

ML-9/LEDS




- High technology LED
- Easy installation / mounting
- Low profile
- High aesthetics
- 3 hours autonomy duration
- Maintained or non maintained operation



## Slim Light

### TECHNICAL SPECIFICATIONS

	ML-8/leds	ML-9/leds
VOLTAGE	220-240V AC/50-60Hz	
MAX. POWER CONSUMPTION	2,7W / 3VA	3W / 3,5VA
BATTERY (Ni-Cd)	3,6V/0,6Ah	3,6V/1Ah
INDICATIONS - CONTROLS	Battery charge indication LEDs, TEST button	
CHARGING TIME	24 hours	
MINIMUM AUTONOMOUS DURATION	1,5 hour	3 hours
ILLUMINATION SOURCE	12 white LED's	
ILLUMINATION (230V AC / emergency)	35lm / 85lm	32lm / 85lm
DEGREES OF COVER PROTECTION	IP 20	
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3	
OPERATION TEMPERATURE RANGE	5 to 40 °C	
RELATIVE HUMIDITY	Up to 95%	
CONSTRUCTION MATERIALS	Bayblend Fr3010, transparent polycarbonate	
EXTERNAL DIMENSIONS	240 x 90 x 44 mm	
TYPICAL WEIGHT	345gr.	350gr.
GUARANTEE	3 years (1 year for the battery)	

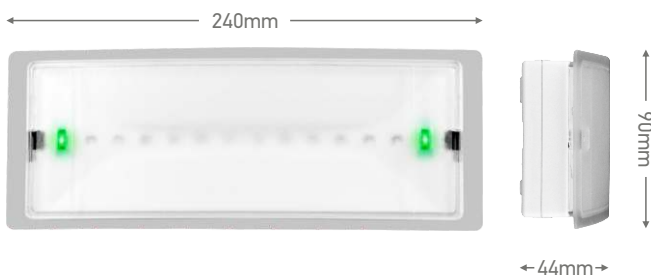

**MOD-LIGHT Group d.o.o.**  
e-mail: [mlgroupdoo@gmail.com](mailto:mlgroupdoo@gmail.com)

Distributor